POMEAS

PMS-25LC10M

10MP4/3"MachineVisionFALens.

Focallength35mm.IrisrangeF2.0-F22

4/3"	10MP	Focal Length 35mm	Iris Range F2.0-F22	C-Mount

Products Advantage

1.Support 4/3" camera.

2.Focus and iris locking screw to ensure stable focusing.

3.Low distortion, sharp image.

4.Compact structure, excellent optical performance.

Application Fields

Application: widely used in machine vision, automatic production and electronic communication field.

Parametric

Max.Sensor Size		
4/3"	17.6mm X 13.2mm	ϕ22mm
Focal Length (MM) ：35.0mm		
Iris Range : F2.0- F22		
Focusing Range : 0.2m-∞		
Distortion : -0.52%@y = 11.5mm		
Back Focal Length :18mm		
Mount：C-Mount		
Filter Thread：M46.0XP0.75mm		
Field Of View(DxHxV)		
4/3"	1"	2/3"
29.6°x22.4°	20.8°x15.7°	14.4°x10.8°

Dimension Drawing

Unit:mm

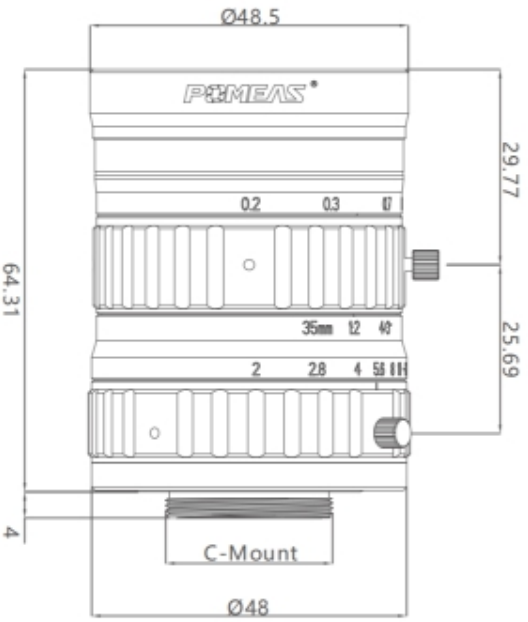

T.86-769-2266 0867 F.86-769-2266 0857 E.markering@pomeas.com
Add: No.68,Chongwei Road,Baizhoubian,East district,Dongguan,China,523000
Add: Building 15#, CIMC Park,High And NewTechnology Industries Development Area,Songshan Lake, Dongguan